


4 Channel UTP

Features

- ★ Transmission Distance: 300 Meters
- ★ Input Power Supply: 100~240V AC(50~60HZ)
- ★ Connector: Standard AC JACK
- ★ Max Output Current: 2.8Amp
- ★ Signal Band: 250MHz (-3db)
- ★ Interference Rejection: >60db
- ★ Video Output Connectors: BNC Male

| Model | S-4UTP |
|-------------------------|--|
| Transmission Distance | 300 Meters |
| Wire Category | Cat 5/5e/6 UTP cable |
| Output power supply | 4CH*12V 1500MA |
| Input Power Supply | 100~240V AC(50~60HZ) |
| Connector | Standard AC JACK |
| Max Output Current | 2.8Amp |
| Compatible with | All baseband signals, including PAL, NTSC, SECAM |
| Signal Band | 250MHz (-3db) |
| Balance Band | 0~6MHZ |
| Attenuation | <1.5db |
| Interference Rejection | >60db |
| Video Output Connectors | BNC Male |
| UTP Cable Connectors | RJ-45, impedance: 100Ω |
| Video output protection | 2KV (common mode), 10/700us IEC61000-4-5 |
| Video input protection | 2KV (different mode), IEC61000-4-5, 4KV (common mode) 10/700us |
| Connection status | Normal (LED ON); Abnormal (LED OFF) |
| Working Temperature | -20° C ~ +70° C |
| Relative Humidity | 0--95% (no condensing) |

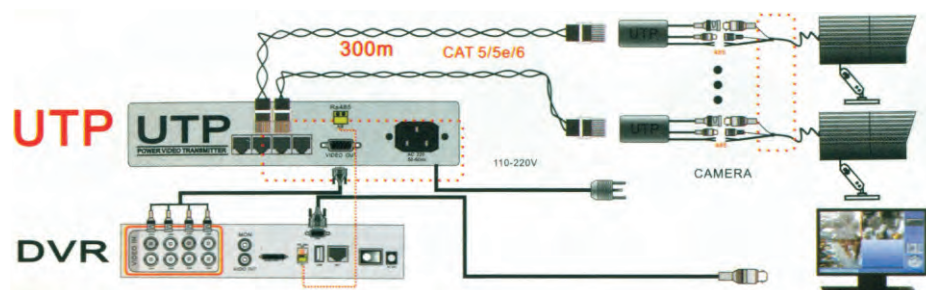

Power Solution on Coaxial Cable