


# 8 Channel UTP

## Features

- ★ Transmission Distance: 300 Meters
- ★ Input Power Supply: 100~240V AC(50~60HZ)
- ★ Connector: Standard AC JACK
- ★ Max Output Current: 2.8Amp
- ★ Signal Band: 250MHz (-3db)
- ★ Interference Rejection: >60db
- ★ Video Output Connectors: BNC Male

Model	S-8UTP
Transmission Distance	300 Meters
Wire Category	Cat 5/5e/6 UTP cable
Output power supply	8CH*12V 1500MA
Input Power Supply	100~240V AC(50~60HZ)
Connector	Standard AC JACK
Max Output Current	2.8Amp
Compatible with	All baseband signals, including PAL, NTSC, SECAM
Signal Band	250MHz (-3db)
Balance Band	0~6MHZ
Attenuation	<1.5db
Interference Rejection	>60db
Video Output Connectors	BNC Male
UTP Cable Connectors	RJ-45, impedance: 100Ω
Video output protection	2KV (common mode), 10/700us IEC61000-4-5
Video input protection	2KV (different mode), IEC61000-4-5, 4KV (common mode) 10/700us
Connection status	Normal (LED ON); Abnormal (LED OFF)
Working Temperature	-20° C ~ +70° C
Relative Humidity	0--95% (no condensing)

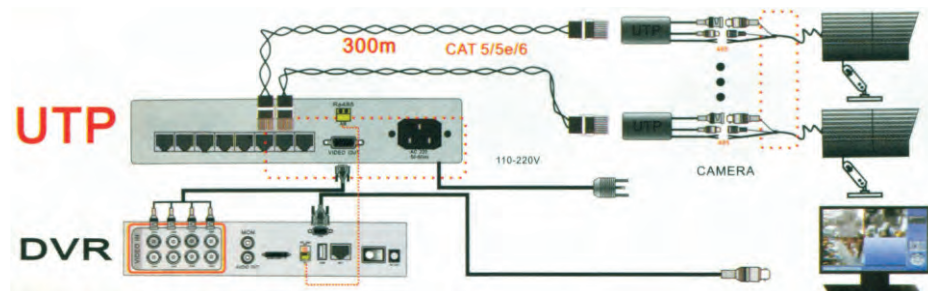

Power Solution on Coaxial Cable