




# 720P HD IP PT Dome IR Camera

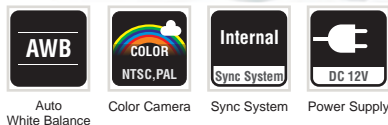

## Features

- ★ 1/3" Megapixel CMOS Sensor
- ★ Megapixel 3.6mm fixed lens
- ★ Support IR CUT
- ★ Support TF card local storage
- ★ Support cloud monitor, Upnp
- ★ Support WiFi
- ★ G.711a Audio Compression
- ★ PTZ Supported



## Model

S-PTD10

Image Sensor	1/3" Megapixel CMOS Sensor
Min. Illumination	Color: 0.1Lux @ (F1.2, AGC ON), 0 LUX with IR, B/W: 0.1Lux@ (F1.2, AGC ON), 0 Lux with IR
Electronic Shutter	1/50 (1/60)s ~ 1/100,000s
Lens	Megapixel 3.6mm fixed lens
Rotation	Level: 330°, Vertical: 90°
Day / Night	Support IR Cut
IR LED	11 IR LED
IR Distance	10 ~ 15 Meters
Video Compression	H.264 High profile, JPEG snapshot
Bite Rate	32kbps ~ 2mbps
Audio Compression	G.711a
Frame Rate	25 fps (PAL) / 30 fps (NTSC)
Max. Image Resolution	1280 * 720
Image Setting	Saturation, Brightness, Contras adjustment through client software or web server
Storage	Support TF Card and Network Storage
Intelligent Alarm	Motion detect, Video loss, Network disconnection, IP address conflict, Storage full, Storage error
Protocol	TCP/IP, HTTP, DHCP, DDNS, PPPoE, SMTP, NTP (HTTPS, SIP, 802.1x, IPv6 Optional)
Basic	Anti-flicker, Dual stream, Heartbeat, Password Protection
PTZ	Support
Audio Input	1ch Microphone
Audio Output	Built-in Speaker
Net Interface	RJ45 10M/100M
Alarm Input	1ch
USB	1 x USB port
Wifi	Supported
TF Card	Supported
Operating Condition	-10°C ~ 60°C, Humidity 90%
Power Supply	DC5V ±10%
Power Consumption	15W Max

IP Pan / Tilt Dome IR Camera