




## Specification

Model	SIP-HSD-1HD-36XM	SIP-HSD-2HD-36XM
Image Sensor	1/4" Megapixel CMOS Sensor	
Resolution	1.3 Megapixel	2 Megapixel
Minimum illumination	0 Lux/F1.2 (IR ON)	
Backlight compensation	On/off	
White balance	Auto	
Electronic shutter	Pal:1/25~1/100000s NTSC:1/30~1/100000s	
Focus length	5-180mm	
Optical Focus	36x	
Focus Mode	Auto/Manual, using high-performance DSP to realize complete digit and ultra-high speed continuous focus function	
IR distance	150m	
Presets	256	
Image Setting	BLC / HLC / 3DNR	
Cruise track	8 groups, each group for 16 presets	
Petrol track	4 groups, each group record 3 mins	
Rotation range	Horizontal 360° unlimited, Vertical 90°, Auto reverse	
Rotation speed	Horizontal & Vertical Min 0.01°, Max 200° /S	
Network protocol	TCP/IP, UDP, RTP, RTSP, RTCP, HTTP, DNS, DDNS, DHCP, FTP, NTP, PPPOE, SWTP, UPNP	
Video compression	H.265 Main Profile encoding; MJPEG/JPEG Baseline encoding	
Audio compression	G.711, G.726	
Video bit rate	32 Kbps-16Mbps continuously adjustable, support CBR/VBR	
WDR	Yes	
ONVIF protocol	Support	
Power supply	DC12V/4A	
Work temperature	-20°C~+58°C	
Humidity	<95%RH	
Housing	Metal Body Construction	

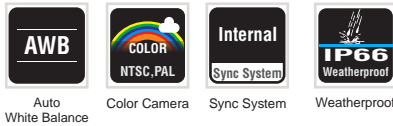

### Features

- ★ 1/4" Megapixel CMOS Sensor
- ★ 1.3 / 2 Megapixel Resolution
- ★ 36x Optical Zoom
- ★ 256 Presets
- ★ 150m IR Distance



36X IP 1.3 / 2MP High Speed Dome PTZ Camera

